

Operate packed pumps with no flushing!




Use SLADE USA Patented 3300G Expanded Graphite Packings and run your pumps **WITHOUT FLUSH!**

- Outlast traditional packings by up to 6 times.
- Virtually no shaft wear.
- No need for hardened shafts or sleeves.
- No need for repacking, just add on a ring of packings.
- Reduces maintenance labour cost and downtime.
- Flush water utilities savings.



**No Lantern Ring Needed.
No Flushing Needed.**

TESTED & PROVEN !!

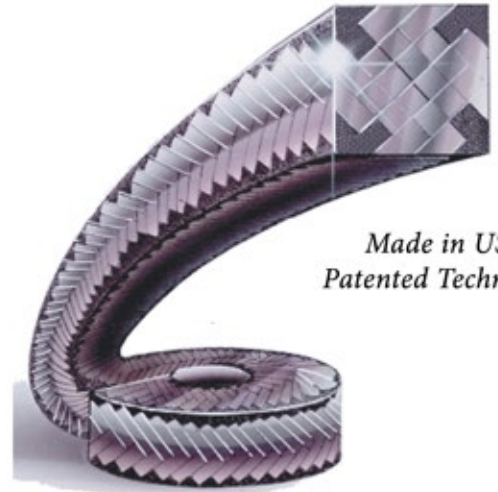

*Made in USA
Patented Technology*

the "Mechanical Seal on a Spool"™

Information about SLADE Patented Sealing Products:

- Manufactured only with 99.26% purity Nuclear Grade Expanded Graphite.
- Reinforced with structural grade carbon fibre monofilaments core.
- Patented Pultrusion Manufacturing method ensures expanded graphite is firmly adhered to the carbon fibre core.
- **No added additives or impregnates of lubricants or inhibitors.**
- Operating pH range: 1 to 14 (except strong oxidisers).
- Operating Temperature range: Up to 1000°C.
- Operating Rotation Speed: Flush Free in many services to 1400m/min

GOLDSARK 

Exclusively Marketed by: Goldspark Pte Ltd
Blk 1014 Geylang East Ave 3 #06-238 Singapore 389729
Tel: +65 8835 3702 Email: sales@goldspark8.com
Website: www.goldspark8.com