

SLADE Packings Applications


Use **SLADE USA Patented 3300G Expanded Graphite Packings** and run your pumps **WITHOUT FLUSH!**

- Outlast traditional packings by up to 6 times.
- Virtually no shaft wear.
- No need for hardened shafts or sleeves.
- No need for repacking, just add on a ring of packings.
- Reduces maintenance labour cost and downtime.
- Flush water utilities savings.



**No Lantern Ring Needed.
No Flushing Needed.**

TESTED & PROVEN !!

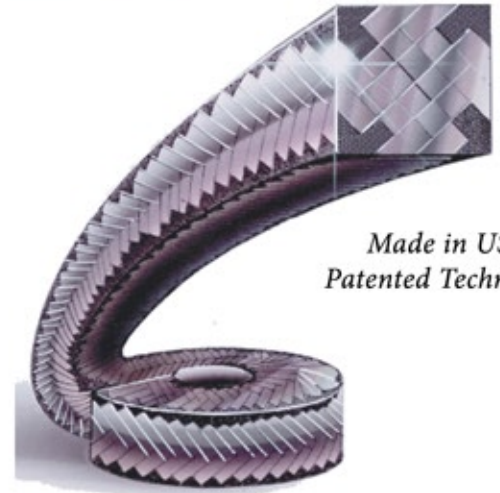

Made in USA
Patented Technology

the "Mechanical Seal on a Spool"TM

96% of valves packed with SLADE VOC Emission Valve Packings have ZERO emissions.

- Within MTBM, valves packed with Slade are covered with a **Lifetime Replacement Warranty!**
- Approvals by Major Companies for VOC Controls. (Exxon, Shell Global, Chevron, Dupont and PERF)

Manufacturers of
Patented "Reinforced"
Graphite Foil* Yarns,
Braided Packings,
and Gaskets.



Leak-Free



Emissions Safe



Fire Safe



Flush-Free

*Available: carbon fiber and flat foils of SS, Inconel®, and exotic metals.



Information about SLADE Patented Sealing Products:

- Manufactured only with 99.26% purity Nuclear Grade Expanded Graphite.
- Reinforced with structural grade carbon fibre monofilaments core.
- Patented Pultrusion Manufacturing method ensures expanded graphite is firmly adhered to the carbon fibre core.
- **No added additives or impregnates of lubricants or inhibitors.**
- Operating pH range: 1 to 14 (except strong oxidisers).
- Operating Temperature range: Up to 1000°C.
- Operating Rotation Speed (Pumps): Flush Free in many services to 1400m/min
- Operating Pressure range (Valves): 350 bar without end rings (compress at least 28%)

GOLDSPARK8

Exclusively Marketed by: Goldspark Pte Ltd

Blk 1014 Geylang East Ave 3 #06-238 Singapore 389729

Tel: +65 8835 3702

Email: sales@goldspark8.com

Website: www.goldspark8.com